




# Na-Fix - Adhesive Tape

## Nagel - Laminating adhesive tape

Art.-Nr. 200.100 /.101 /.102

The LTS-Nagel fixation laminating tape has an extremely high adhesive strength and temperature stability on smooth surfaces. Therefore, the vapor-permeable adhesive tape is ideally suited for laminating glass in laminated glass production (VSG). The polyester carrier with a thickness of 50 µm offers excellent tensile and tensile strength, which is particularly important when lifting the composites.

Temperature-stable adhesive membranes with high adhesive strength and air permeability for the technical laminating of glasses and VSG and many other materials.

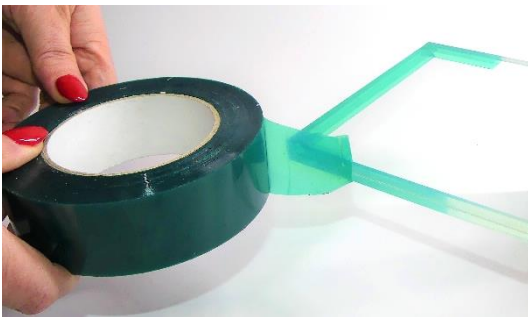

- Production of laminated glass and laminated safety glass (LSG).
- Tearproof and permeable
- Roll width 24 mm, 36 mm, 48 mm x 66 meters
- Temperature range up to -60 ° C to 230 ° C.
- High adhesive power on smooth surfaces
- Removable without residue even on coated glass

**Na-Fix-Tape** width: 24 mm x 66 m - VE 36 pcs.

**Art.-Nr. 200.100**

**Na-Fix-Tape** width: 36 mm x 66 m - VE 24 pcs.

**Art.-Nr. 200.101**

**Na-Fix-Tape** width: 48 mm x 66 m - VE 18 pcs.

**Art.-Nr. 200.102**

### Anwendung:

The surface to be bonded should be clean, dry and free of grease, silicone or dust. At the time of application, the adhesive tape and the surface to which it is to be adhered should have a temperature between 18 ° C and 30 ° C. The relative humidity should be between 50% and 60%. The adhesive should be for min. 10 seconds with a pressure of min. 0.02 MPa are applied.

**LTS-NAGEL**

Holtkampweg 58, 45721 Haltern am See  
E-Mail: info@LTS-Nagel.de