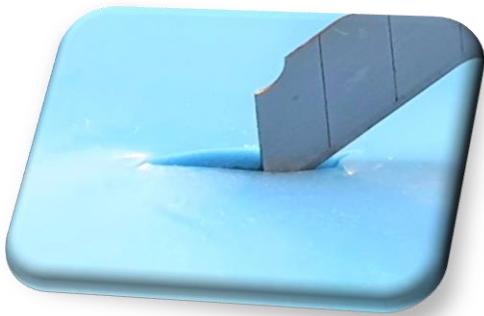

Repair-kit for silicone membrane

Art.-Nr. 200.006

The essential problem solver, to fix small and medium leaks in the membrane.



A leaky membrane can be a major problem, especially in a busy production. Glass splinters, sharp edges and other dangers lurk almost everywhere, so that even the best membrane sometimes has to be beaten under such loads.

And as so often, there is no replacement membrane at hand or there are long-term delivery times.

Exactly for these situations, the repair kit from LTS-Nagel is the solution.

Applications of LTS-Nagel membrane Repair-kit

This professional repair kit for silicone membranes and mats makes it possible to repair the membrane on your own. Experience has shown that using the enclosed ELASTOSIL® E43 silicone adhesive and the Kit, small holes - so-called "pinholes" in the membrane can be repaired easily and quickly. (Please refer to the data sheet) With the supplied patches DIN A5 can easily repair small cracks and large holes airtight, so that the production can continue quickly.

LTS-Nagel - Repair kit

- LTS-Nagel membrane Repair patch 1,5mm Din-A5
- Silicone adhesive ELASTOSIL® E43 Tube 90ml
- Cleaning wipes with alcohol
- Sanding pad

The fast rescue for small and medium leaks in the membrane

LTS-NAGEL

Holtkampweg 58, 45721 Haltern am See
E-Mail: info@LTS-Nagel.de



Product description "ELASTOSIL® E43 Silicone adhesive

ELASTOSIL® E43 TRANSPARENT CARTRIDGE is a self-levelling one-component silicone rubber with very good mechanical properties, which cures at room temperature under the influence of atmospheric moisture.

Special features

- acetic acid-curing system
- self-levelling
- excellent primerless, adhesion to many substrates

Application

- Multipurpose glue.

Processing

ELASTOSIL® E43 TRANSPARENT CARTRIDGE shows good primerless adhesion to many substrates. We recommend running preliminary tests to optimize conditions for the particular application.

Storage

The 'Best use before end' date of each batch is shown on the product label.

Storage beyond the date specified on the label does not necessarily mean that the product is no longer usable. In this case however, the properties required for the intended use must be checked for quality assurance reasons.

Safety notes

During vulcanization of ELASTOSIL® E43 TRANSPARENT CARTRIDGE, a total of 4 % by weight of acetic acid is split off. These vapours should not be inhaled for long periods or in high concentration. Work areas should therefore be well ventilated. Contact of unvulcanised silicone rubber with eyes and mucous membranes must be avoided as this would cause irritation. However, if it does happen, rinse the affected area thoroughly. Comprehensive instructions are given in the corresponding Material Safety Data Sheets. They are available on request from WACKER subsidiaries or may be printed via WACKER web site <http://www.wacker.com>.